

Autotransformer AT3 2-69-23



Picture shows AT3 2-20/21-4


Advantages

Reverse mode possible
High efficiency
Patented assembly technology to lower heat losses
Very good corrosion protection and low noise due to BLOCK IMPEX vacuum impregnation
Fixed, contact protected screw connection terminals complying with UVV BGV A3
Multi-functional mounting brackets with 12 slots
Enlarged mounting bracket for easy installation from above
Integrated crane eyes

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application

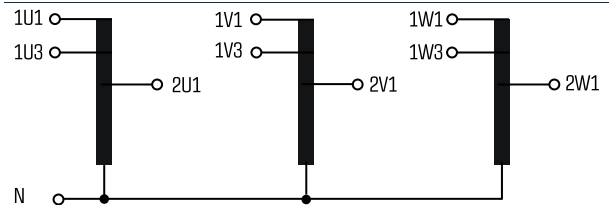

Standards

Autotransformer
to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13,
IEC 61558-2-13, UL 5085-1/-2, CSA 22.2 No.66

Approvals



UL 5085-1/-2, CSA 22.2 No.66



Autotransformer AT3 2-69-23

Electrical data

Type	AT3 2-69-23
Input	
Rated input voltage	3 x 690 Vac
Rated frequency	50 - 60 Hz
Output	
Rated output voltage	3 x 400 Vac
Power	2,000 VA
Vector group	YNΔ0
Efficiency	90 %
Approvals	
Approvals	cURus
Environment	
Ambient temperature max.	104.0 °F
Safety and protection	
Type	Open type
Insulation class	F
Protection index	IP 23
Safety class (prepared)	I
Short circuit strength	non-short-circuit proof
Test voltage	4,000 Vac, 50 Hz
Order numbers	
Recommended sheet-metal enclosure	
Order Number	AT3 2-69-23

Mechanical data

Type	AT3 2-69-23
Terminal and mounting	
Fixing method	Mounting brackets
Fixing screws	M6
Terminals	Screw-type terminals
Terminals Input	Screw clamp, 4 mm²
Terminals Output	Screw clamp, 4 mm²
Connection type	Bolt, M5
Measures and weights	
Core type	3 UI 90/41,5
Weight	0.00 lbs

Dimensions in inch

