

# Control- and safety isolating transformer USTE 40/2x12



Picture shows USTE 1000/2x115

## Advantages

Universal input voltages 208 to 600 Vac
Very good switch-on behaviour thanks to reduced starting currents
High power density due to a compact construction design
Very good corrosion protection and low noise thanks to BLOCK IMPEX vacuum impregnation
Quick to cable up thanks to the use of push-in terminals
Contact protected screw connection terminals complying with UVV BGV A3
Simple mounting thanks to robust metal footplate with oval slots
Up to 250 VA with combination footplate for bolted and rail mounting


## Applications

As a control transformer for the electrical isolation of the input and output sides. The construction of the transformer to supply control systems according to VDE 0113 is designed.

As an isolating transformer for the safe electrical isolation of the input and output sides. The transformer may be used to set up protective separation as a protective measure in accordance with VDE 0100.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application



## Standards

Control transformer  
to: VDE 0570 Teil 2-2, DIN EN 61558-2-2, EN 61558-2-2, IEC 61558-2-2,  
UL 5085-1/-2, CSA 22.2 No.66  
Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,  
UL 5085-1/-2, CSA 22.2 No.66

## Approvals



UL 5085-1/-2, CSA 22.2 No.66




# Control- and safety isolating transformer

## USTE 40/2x12

Type		USTE 40/2x12
<b>Electrical data</b>	Input	208 Vac/ 230 Vac/ 380 Vac/ 400 Vac/ 415 Vac/ 440 Vac/ 460 Vac/ 480 Vac/ 500 Vac/ 525 Vac/ 550 Vac/ 575 Vac/ 600 Vac
	Rated input voltage	50 - 60 Hz
	Rated frequency	2 x 12 Vac
	Output	40 VA
	Rated output voltage	100 VA
	Rated power VDE (DB cos phi=1)	1.07
	Rated power VDE (KB cos phi=0.5)	87.0 %
	No-load voltage (app. x factor)	
	Efficiency	
	Standards	
Classification	Control- and safety isolating transformer	
Approvals		
Approvals	cULus	
Environment		
Ambient temperature max.	40 °C	
Type of cooling	self-cooling	
Safety and protection		
Type	Open type	
Insulation class	VDE=B, UL=class 130	
Protection index	IP 00	
Safety class (prepared)	I	
Short circuit strength	non-short-circuit proof	
PRI Fusing recommendation by circuit breaker with tripping characteristic type 20 x I <sub>rated</sub> related to set)		
Setting range 208 - 230 Vac	0,16 - 0,25 A	
Setting value 208 - 230 Vac	0,24 A	
Setting range 380 - 415 Vac	0,1 - 0,16 A	
Setting value 380 - 415 Vac	0,13 A	
Setting range 440 +20 Vac	0,1 - 0,16 A	
Setting value 440 +20 Vac	0,12 A	
Setting range 500 -20/+25 Vac	0,1 - 0,16 A	
Setting value 500 -20/+25 Vac	0,10 A	
Setting range 575 ±25 Vac	0,1 - 0,16 A	
Setting value 575 ±25 Vac	0,10 A	
Order numbers		
<b>Order Number</b>	<b>USTE 40/2x12</b>	

Type		USTE 40/2x12
<b>Mechanical data</b>	Terminal and mounting	Dual purpose base plate also for installation on mounting rails
	Fixing method	M4
	Terminals Input	push-in terminals, 4 mm <sup>2</sup>
	Terminals Output	push-in terminals, 4 mm <sup>2</sup>
Terminals PE	Tab connector, 6.3 x 0.8 mm	
Measures and weights		
Weight		1.4 kg

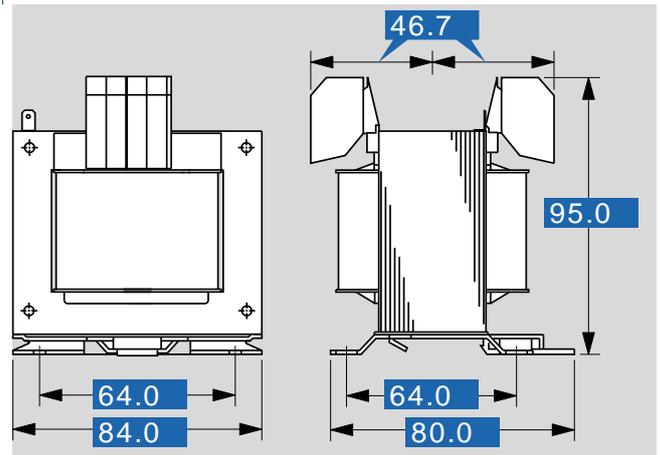

Subject to change.