

Metal enclosures

BGUK 3



Picture shows BGUK 30/2

Advantages

Integrated rail system for the installation of different product sizes (BGUK 30 - BGUK 60)
Excellent corrosion protection and high abrasion resistance through powder-coated surface RAL 5008
Ventilation openings for optimized cooling
Faceplate without cooling fins for individual connection options (BGUK 10 - 60)
Integrated crane eyes

Applications

Universal metal enclosure with cooling fins for degree of protection IP20/IP23

Approvals



Metal enclosures BGUK 3


Electrical data

Type	BGUK 3
Operating data	
Enclosure suitable for protection index	IP 20
For power (single-phase)*	500 VA
For power (three-phase)*	400 VA
Max. Power loss (at 40 °C ambient temperature)	48 W
Notes	
*	The indicated power is a guideline. Deviations may occur depending on the version of the transformer.
Order numbers	
Order Number	BGUK 3

Mechanical data

Type	BGUK 3
Terminal and mounting	
Floor mounting	No
Wall mounting	Yes
Cable glanding type	2x PG 11
Cable glanding Ø	0.2 - 0.39 inch
Measures and weights	
Effective inside dimension (W)	8.27 inch
Effective inside dimension (D)	7.68 inch
Effective inside dimension (H)	8.66 inch
Fixing hole Ø	0.22 inch
Weight	8.82 lbs

Dimensions in inch

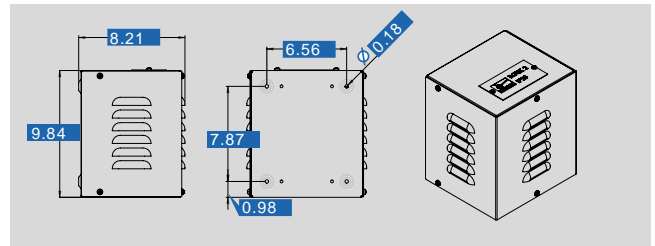

Subject to change.