


## Detuned reactor **DR3 50/14/T**

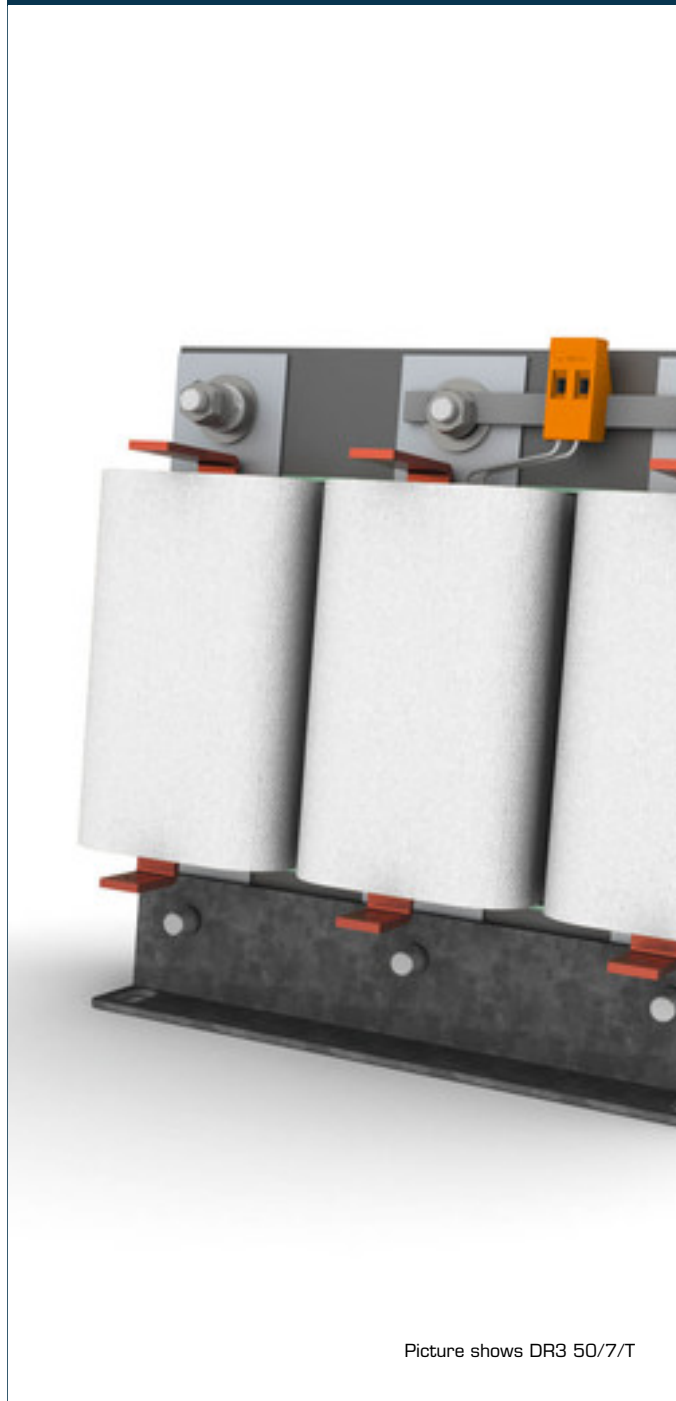

Picture shows DR3 50/7/T

### Advantages

No overloading of the capacitors
Stabilizing mains impedance
Low inductance tolerance
Very good corrosion protection and low noise due to vacuum impregnation
Extended linearity
Thermal design for continuous duty in the event of mains operation and harmonics
Optional with thermal switch

### Applications

Detuned reactor for choking idle reactive power compensation capacitors.

### Standards

Detuning reactor in accordance with EN 61558 Part 1, 61558 Part 20,  
UL 506, CSA 22.2

### Approvals



UL 506, CSA 22.2



# Detuned reactor DR3 50/14/T

Type		DR3 50/14/T
Electrical data	Operating data	
	Rated voltage	3 x 400 Vac
	Rated frequency	50 Hz
	Current per phase at 50 Hz (I) for reactive power	72 A
	Inductance linear to (at #95 % L; Im)	50 kVAr
	Inductance per phase (L)	129.6 A
	Tolerance	1.66 mH
	Detuning factor	±3 %
	Temperature control	ρ = 14 %
	Resonance frequency	Yes
	Output	
	Power loss	134 Hz
	Environment	
	Ambient temperature max.	320 W
	Safety and protection	
	Type	104 °F (140 °F Cl. H)
	Insulation class	Open type
Protection index	F (104 °F) / H (140 °F)	
Safety class (prepared)	IP 00	
Test voltage	I	
Order numbers		
Order Number	2500 Vac, 50 Hz	
	<b>DR3 50/14/T</b>	

Type		DR3 50/14/T
Mechanical data	Terminal and mounting	
	Fixing method	Fixing rail
	Fixing screws	M8
	Terminals phase	Flat copper
Connection type		Bolt, M8
Measures and weights		
Weight	85.98 lbs	

## Dimensions in inch

